

# CUBIST ADJUSTABLE DL

Versatile ultra-low brightness cubist cell downlight with 25 degree tilt adjustability.



Project \_\_\_\_\_

Date \_\_\_\_\_

Type \_\_\_\_\_

## ORDERING INFORMATION

MODEL	TRIM	CCT	FINISH	CRI	WATT	BEAM ANGLE	VOLT	DIMMING
CUA-5	(BLANK)- TRIMMED SF- SPACKLE FLANGE	27- 2700K 30- 3000K 35- 3500K	W- White B- Black	90- 90CRI	12- 12W	15- 15 ° 30- 30 ° 40- 40 °	120- 120V 277- 277V UNV- UNV	D- 0-10V Dim
CUA-10					21- 21W			
CUA-15					28- 28W			
CUA-								


## LUMEN OUTPUT & WATTAGE(BASED ON 3000K)

	CUA-5			CUA-10			CUA-15		
Wattage	12 W			21 W			28 W		
Beam Angle	15°	30°	40°	15°	30°	40°	15°	30°	40°
Lumen Output	625 lm	679 lm	668 lm	1340 lm	1370 lm	1321 lm	1917 lm	1969 lm	1862 lm

## FIXTURE DIMENSIONS


### CUA-5

TRIMMED

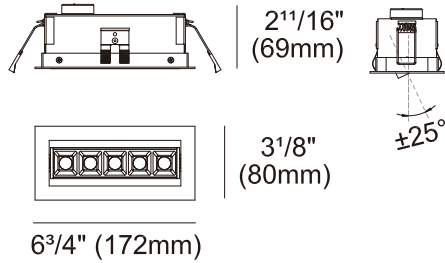


### CUA-5-SF

SPACKLE FLANGE

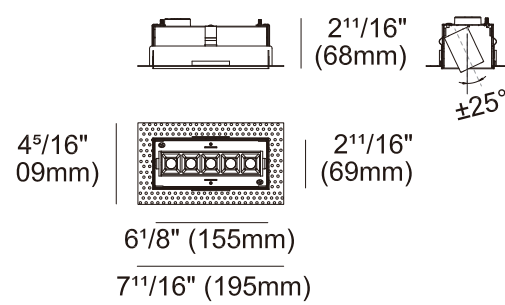


### CUA-10

TRIMMED

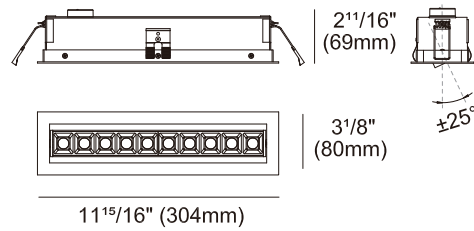


### CUA-10-SF

SPACKLE FLANGE

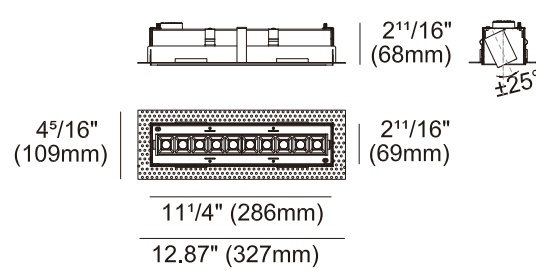


### CUA-15

TRIMMED

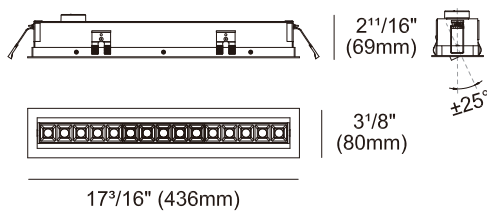

### CUA-15-SF

SPACKLE FLANGE

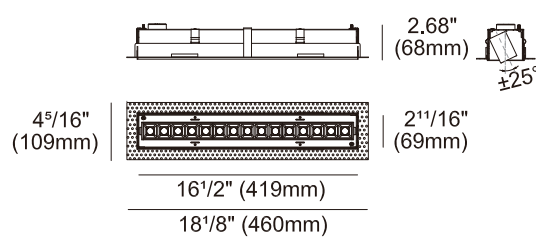


## PHOTOMETRIC CURVES


### CUA-5




\*UNIT: CD



AT 3000K, 90CRI  
3000K- 15° BEAM



3000K- 30° BEAM




3000K- 40° BEAM


### CUA-10




\*UNIT: CD



AT 3000K, 90CRI  
3000K- 15° BEAM



3000K- 30° BEAM




3000K- 40° BEAM


### CUA-15




\*UNIT: CD



AT 3000K, 90CRI  
3000K- 15° BEAM



3000K- 30° BEAM



3000K- 40° BEAM

## FIXTURE SPECIFICATION

### LED CHIPS

Cree LED

### HOUSING

Aluminum body

### WARRANTY

5 year warranty.

### IP RATED


IP20, indoor dry location only.

### LISTING

ETL certification


## FIXTURE HOUSING

CUB-ACCH-1-70x426

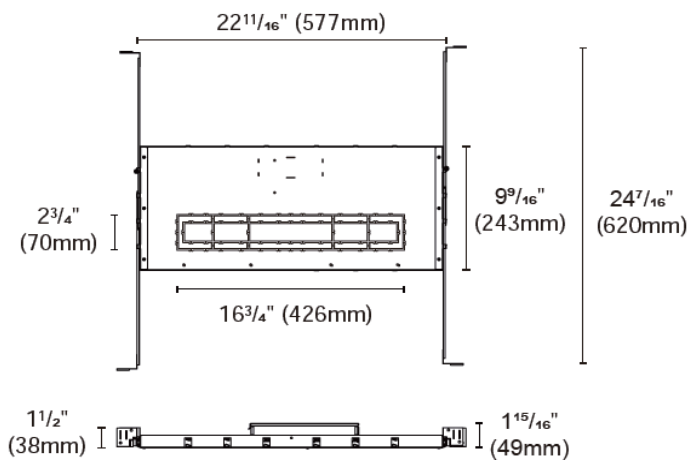

## DRIVER BOX

CUB-ACCG-20A

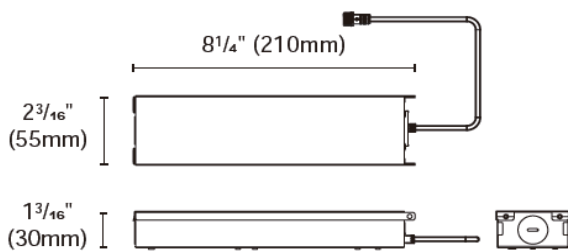

Inside: L  $7\frac{7}{8}$ " (200mm) X W  $2\frac{1}{16}$ " (53mm) X H  $1\frac{1}{16}$ " (27mm)