

COMPOSITION SYSTEM

ADJUSTABLE CYLINDER


Classic cylinder shape track head with adjustable beam angles.



Project _____

Date _____

Type _____

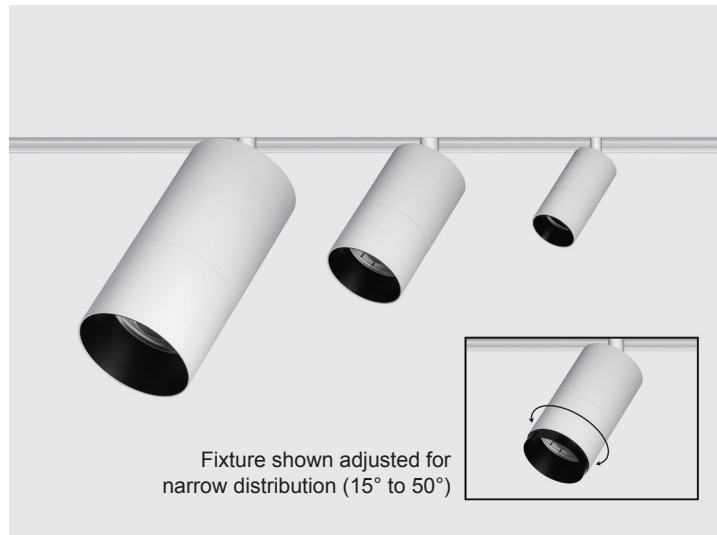

ORDERING INFORMATION

MODEL	CCT	FINISH	CRI	WATT	BEAM ANGLE	VOLT	DIMMING
COCO-HTE-8004N	27- 2700K 30- 3000K 35- 3500K	W- White B- Black	90- 90CRI	06- 6W	A- 15° to 50°	48- 48V	D- 0-10V Dim DA- DALI
COCO-HTE-9891N				13- 13W			
COCO-HTE-9892N				27- 27W			
COCO-HTE-							

LUMEN OUTPUT & WATTAGE (BASE ON 3000K)

	COCO-HTE-8004N	COCO-HTE-9891N	COCO-HTE-9892N
Wattage	6 W	13 W	27 W
Beam Angle	15 ° - 50 °		
Delivered Lumen	229lm - 297lm	785lm - 864lm	1809lm - 1927lm

LUMEN MULTIPLIER

	COCO-HTE-8004N			COCO-HTE-9891N			COCO-HTE-9892N		
CCT	2700k	3000k	3500k	2700k	3000k	3500k	2700k	3000k	3500k
Factor	0.95	1	1.01	0.95	1	1.01	0.95	1	1.01

FIXTURE SPECIFICATION

LED CHIPS

BRIDGELUX V6 LED

HOUSING

Aluminum body

MECHANICAL

Fixture have 360 degree rotation and 90 degree tilt angle. Fixture offers 15 degree to 50 degree adjustable beam angle.

WARRANTY


5 year warranty.

IP RATED

IP20 rated, dry location only.


LISTING

ETL listing, CE listing

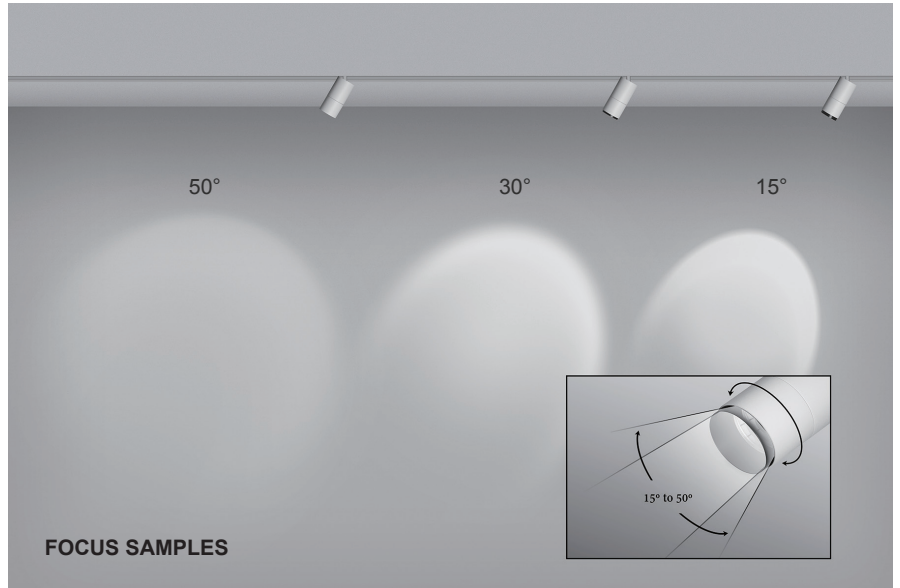


PHOTOMETRIC CURVES & FIXTURE DIMENSIONS


COCO-HTE-8004N




COCO-HTE-9891N



*UNIT: CD



AT 3000K, 90CRI
3000K- 15° BEAM



3000K- 50° BEAM

COCO-HTE-9892N

