


COMPOSITION SYSTEM

LINEAR INSERT CONTINUOUS

Modular linear insert available in 3 standard sizes.

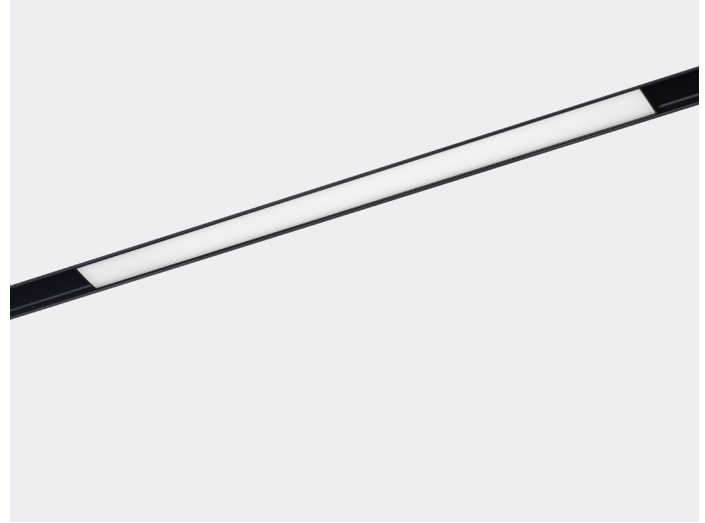

Project _____

Date _____

Type _____

ORDERING INFORMATION

MODEL	CCT	FINISH	CRI	WATT	BEAM ANGLE	VOLT	DIMMING	LENGTH
COCO-LBE-9414	27- 2700K 30- 3000K 35- 3500K	W- White B- Black	90- 90CRI	18- 18W	110- 110°	48- 48V	D- 0-10V Dim DA- DALI	31.5"L
COCO-LBE-9415				23- 23W				47.3"L
COCO-LBE-9416				32- 32W				63"L
COCO-LBE-								

LUMEN OUTPUT & WATTAGE (BASE ON 3000K)

	COCO-LBE-9414	COCO-LBE-9415	COCO-LBE-9416
Wattage	18 W	23 W	32 W
Delivered Lumen	1267 lm	1781 lm	2431 lm

LUMEN MULTIPLIER

	COCO-LBE-9414			COCO-LBE-9415			COCO-LBE-9416		
CCT	2700k	3000k	3500k	2700k	3000k	3500k	2700k	3000k	3500k
Factor	0.99	1	1.02	0.99	1	1.02	0.99	1	1.02

FIXTURE SPECIFICATION

LED CHIPS

Bridgelux 2835 LED

HOUSING

Aluminum body

WARRANTY


5 year warranty.

IP RATED

IP20 rated, dry location only.



LISTING

ETL listing, CE listing

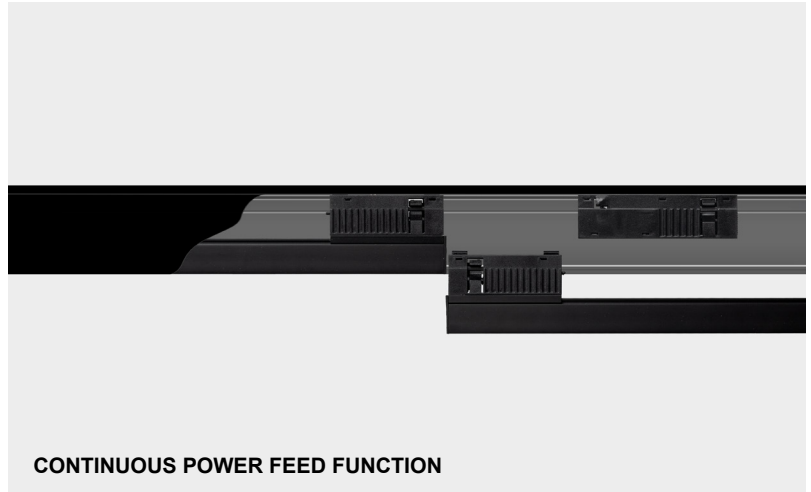



PHOTOMETRIC CURVES & FIXTURE DIMENSIONS

COCO-LBE-9414





AT 3000K, 90CRI
3000K- 110° BEAM

COCO-LBE-9415

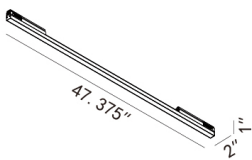

AT 3000K, 90CRI
3000K- 110° BEAM

COCO-LBE-9416



AT 3000K, 90CRI
3000K- 110° BEAM